



Sensorsystem®
Innovative Sensors & Controls for Automation

PRODUCT INTRODUCTION

FEATURES

1. FineTek Models include: extension cable transducer, Anti-corrosive model, flanged models & pressure transducers.
2. Can be connected to digital panel meters, recorders, PLC, signal controllers.
3. The metal diaphragm is suitable in as weak acid and alkaline liquids or sewage water treatment.
4. Our internal temperature compensation ensures long lasting reliability.
5. Customized flange/screw sizes available.

THEORY

A pressure sensor is made up of a piezoresistor Wheatstone bridge.

As shown in fig.2, the pressure is applied to the diaphragm and passes through the silicon oil onto the Wheatstone bridge.

When the liquid pressure acts directly on the front face of diaphragm, the Wheatstone bridge will create a differential voltage. This voltage difference will then be amplified to obtain a current signal of 4-20mA. When this current output is connected to an analog meter, we can scale properly to read the level of the applied liquid in a container or a vessel.

The formula used here is: $P = \theta \times H$

Where P is pressure, θ is pressure constant and H is the level of liquid in a container.

APPLICATIONS

1. EC1100 is a liquid measurement device which can be used in a variety of environments, including water-agitation environments.
2. EC1200 can withstand high temperature liquid environment.
3. The Standard Flange Type, EC1210 can be used in liquid & gas pressure measurement environments (i.e., mildly corrosive environments).
4. EC1300~1320 type is suitable for measurement of very deep water, such as measurement of reservoirs.
5. EC1500 is suitable for pressure measurement or control devices such as those found in hydraulic and pneumatic machines.


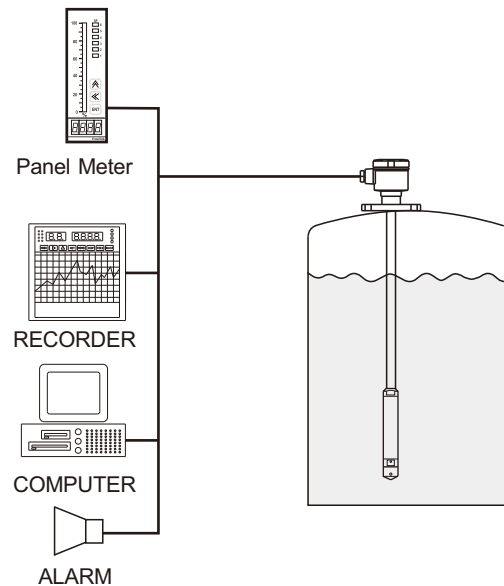


Fig. (1)






$$P = \theta \times H$$

P : Pressure
H: The level of liquid
 θ : Pressure constant




Fig. (2)

SPECIFICATIONS

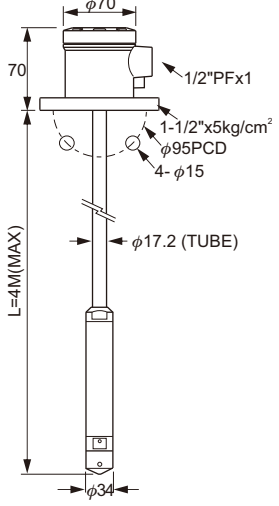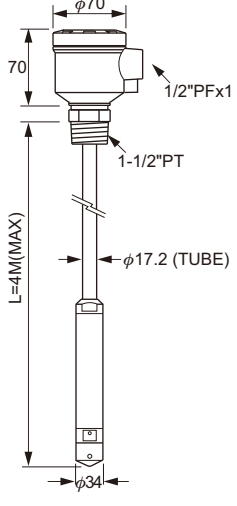

Dimensions (unit:mm)			
Model No.	EC1100 Extension Tube Flange Model	EC1110 Extension Tube Screw Model	EC1200 Hi-Temp.Flange Model
Housing material	Aluminum, IP65	Aluminum, IP65	Aluminum, IP65
Pressure range	0.1, 0.2, 0.4 bar	0.1, 0.2, 0.4 bar	0.1, 0.2, 0.5, 1, 2, 5, 10 bar
Measuring range	0~1M,0~2M,0~4M (assumed with the water S.G:1)	0~1M,0~2M,0~4M (assumed with the water S.G:1)	0~1M,0~2M,0~5M,0~10M, 0~20M,0~50M,0~100M (assumed with the water S.G:1)
Linearity	0.3%FS	0.3%FS	0.3%FS
Long term stability	<0.1%	<0.1%	<0.1%
Operating temp	-10~80°C	-10~80°C	-10~150°C
Ambient temp	60°C	60°C	60°C
Supply voltage	13~36 Vdc	13~36 Vdc	13~36 Vdc
Output	4~20mA,Loop resistance should be less than 500 Ω	4~20mA,Loop resistance should be less than 500 Ω	4~20mA,Loop resistance should be less than 500 Ω
Connection	1-1/2" x 5kg/cm ²	1-1/2" PT	1-1/2" x 10kg/cm ²
Wetted material	SUS 304/316	SUS 304/316	SUS 304/316
Weight	approx. 4.2kg (L=1M)	approx. 4kg (L=1M)	approx. 1.8kg

※Special size flange and screws are available.

※OEM/ODM is welcome.

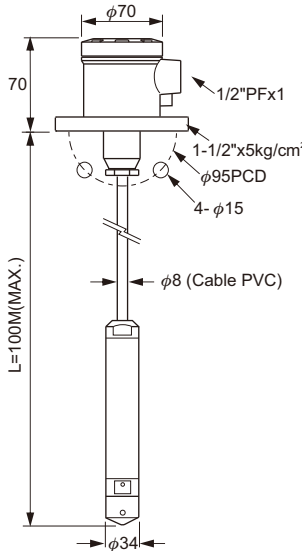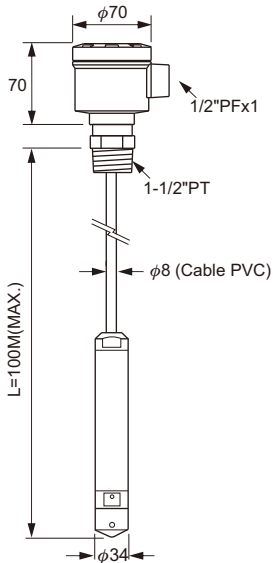Dimensions (unit:mm)			
Model No.	EC1210 Flange Standard Model	EC1300 Extension Cable Flange Model	EC1310 Extension Cable Screw Model
Housing material	Aluminum, IP65	Aluminum, IP65	Aluminum, IP65
Pressure range	0.1, 0.2, 0.4 bar	0.1, 0.2, 0.5, 1, 2, 5, 10 Bar	0.1, 0.2, 0.4, 1, 2, 5, 10 Bar
Measuring range	0~1M,0~2M,0~4M (assumed with the water S.G:1)	0~1M,0~2M,0~5M,0~10M, 0~20M,0~50M,0~100M (assumed with the water S.G:1)	0~1M,0~2M,0~4M,0~10M, 0~20M,0~50M,0~100M (assumed with the water S.G:1)
Linearity	0.3%FS	0.3%FS	0.3%FS
Long term stability	<0.1%	<0.1%	<0.1%
Operating temp	-10~80°C	-10~80°C	-10~80°C
Ambient temp	60°C	60°C	60°C
Supply voltage	13~36 Vdc	13~36 Vdc	13~36 Vdc
Output	4~20mA,Loop resistance should be less than 500 Ω	4~20mA,Loop resistance should be less than 500 Ω	4~20mA,Loop resistance should be less than 500 Ω
Connection	1-1/2" x 5kg/cm ²	1-1/2"x5kg/cm ²	1-1/2"PT
Wetted material	SUS 304/316	SUS 304/316	SUS 304/316
Weight	approx. 1.5kg	approx. 2.8kg (L=1M)	approx. 2.9kg (L=1M)

※Special size flange and screws are available.
 ※OEM/ODM is welcome.

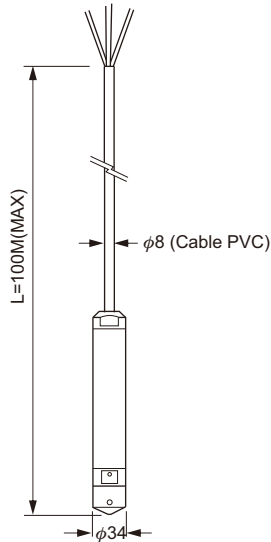Dimensions (unit:mm)		
Model No.	EC1320 Extension Cable Model	EC1500 Pressure Transducer
Pressure range	0.1,0.2,0.5,1,2,5,10 bar	0.1,0.2,0.5,1,2,5,10,20,50,100 bar
Measuring range	0~1M,0~2M,0~5M,0~10M, 0~20M,0~50M,0~100M (assumed with the water S.G:1)	—————
Linearity	0.3%FS	0.3%FS
Long term stability	<0.1%	<0.1%
Operating temp	-10~80°C	-10~80°C
Ambient temp	N. A.	60°C
Supply voltage	13~36 Vdc	13~36 Vdc
Output	4~20mA,Loop resistance should be less than 500 Ω	4~20mA,Loop resistance should be less than 500 Ω
Protection	—————	1/2" PT
Wetted material	SUS 304/316	SUS 304/316
Weight	approx. 0.8kg (L=1M)	approx. 250g

※Special size flange and screws are available.

※OEM/ODM is welcome.

INTERNAL WIRING

1. Ensure power is turned off before connecting.
See fig.3 (depending on the model).
2. Make sure the outlet breather capillary is open for air to flow freely.
3. Please tighten the cover and cable gland after the wiring is finished.
4. The cable should be at least 18 AWG or 16 AWG.

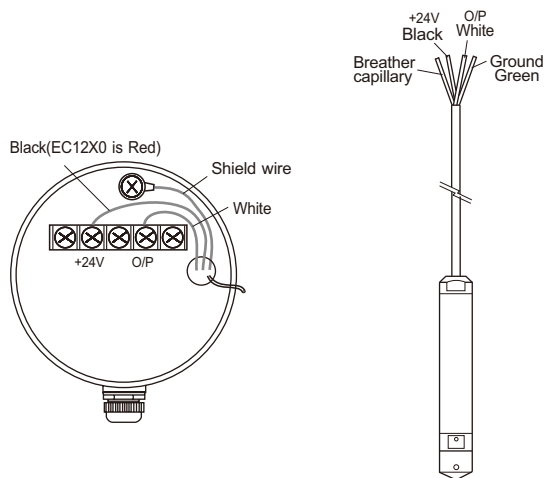


Fig. (3)

EC1500 TYPE

1. Remove the cover of plug and connect cable to the terminal of plug.

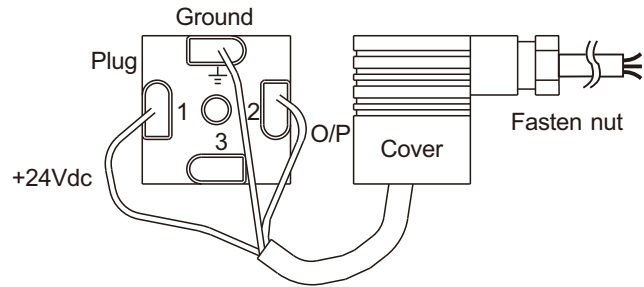


Fig. (4)

2. When wiring is finished, assemble the plug with cover.

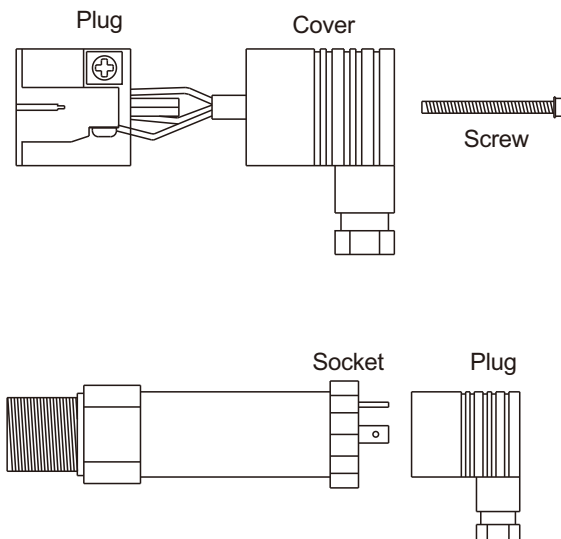


Fig. (5)

EXTERNAL WIRING

1. When connecting panel meters, please refer to the wiring diagram attached and the related operation manual.
2. Wiring connection should be kept away from high voltage cables, (e.g. power cables) to prevent electrical interference.
3. Operating voltage should be kept higher than 13Vdc.
4. Wiring should be used in shielded insulated cable.
5. Provide additional power supply if required (Diagram 7). If installing 2 panel meters at different location, please refer to diagram 8.

EC1100~1110,1200~1210,
1300~1310 Inside view

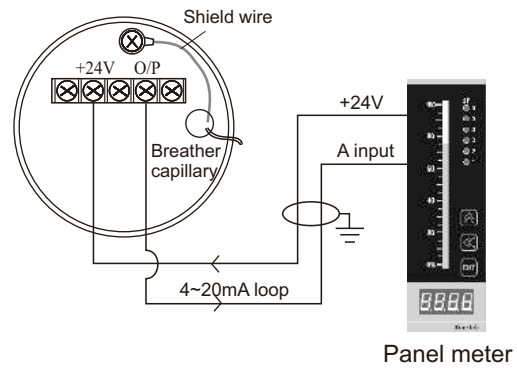


Fig. (6)

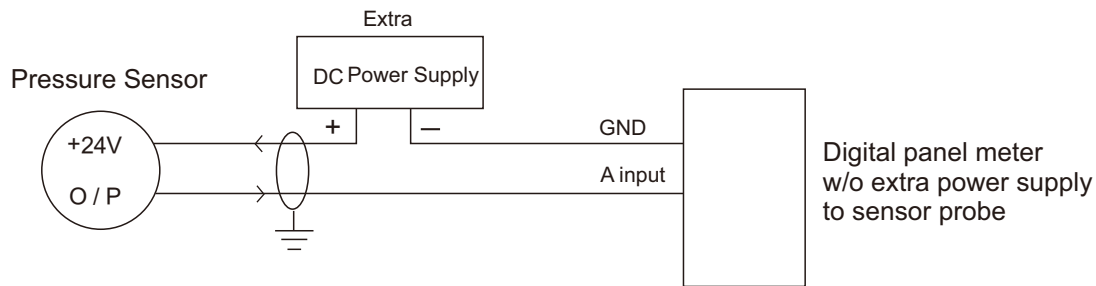


Fig. (7)


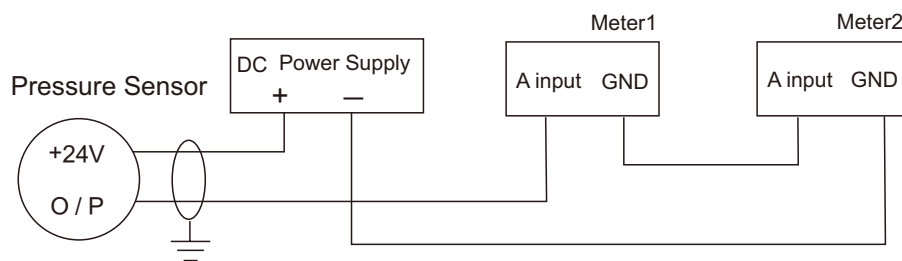


Fig. (8)

ADJUSTMENT (FOR ZERO-SPAN)

- Since Zero & Span adjustment have been made in the factory. Don't change the setting unless necessary. Zero represents the 4mA for an empty tank and Span represents the 20mA for a full tank.
- Adjustment range: (SPAN) 18~24mA, (ZERO) 3~5mA.
- In the case where sensor output requires more than the 4~20mA signal, a panel meter with programmable input (0~25.5mA) can be used.

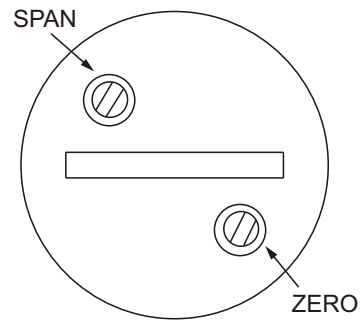

The electrical housing for pressure transducer.

Pressure Unit Conversion Constants



	PSI	KPa	mbar	cmH ₂ O	mmHg	kgf/cm ²
PSI	1	6.89	68.95	70.31	51.71	70.31x10 ⁻³
KPa	0.15	1	10	10.2	7.5	1.02x10 ⁻²
mbar	1.45x10 ⁻²	0.1	1	1.02	0.75	1.02x10 ⁻³
cmH ₂ O	14.22x10 ⁻³	98.07x10 ⁻³	0.98	1	0.74	10 ⁻³
mmHg	19.34x10 ⁻³	13.33x10 ⁻²	1.33	1.36	1	1.36x10 ⁻³
kgf/cm ²	14.22	98.07	980.67	1000	735.56	1

$$1 \text{ MPa} = 10.2 \text{ kgf/cm}^2 = 145 \text{ PSI}$$

$$1 \text{ kgf/cm}^2 = 0.098 \text{ MPa} = 14.22 \text{ PSI}$$

INSTALLATION

1. Note the installation diagrams to the right and select your model accordingly.
2. The flange type transducer is equipped with a side mounted electrical housing.
3. The models EC1100 to EC1310 series have 3 multi-thread copper wires and a breather capillary. Avoid bending cables to ensure maximum accuracy.
4. Do not use liquid that can crystallize or solidify in the pressure transducers and sensors.
5. The tank or vessel should not be vacuum or no pressure state.
8. Handle the sensor probes with care. The sensor probe is delicate and vibration or shock can damage it.
9. Do not use high pressure water jets to wash or contact the sensing diaphragms.

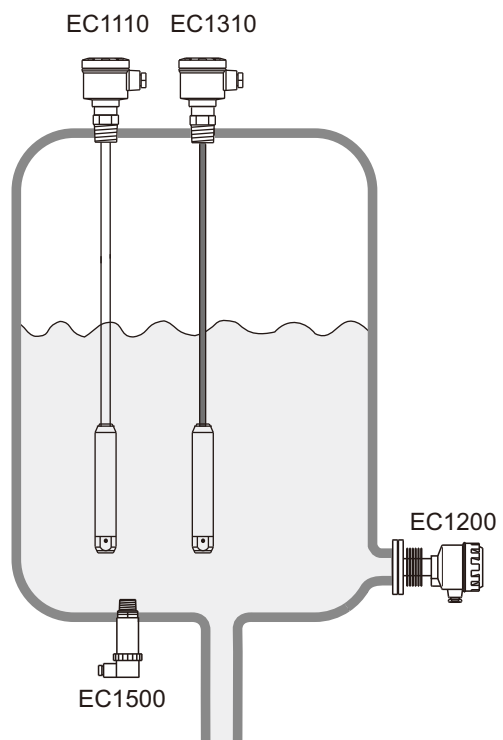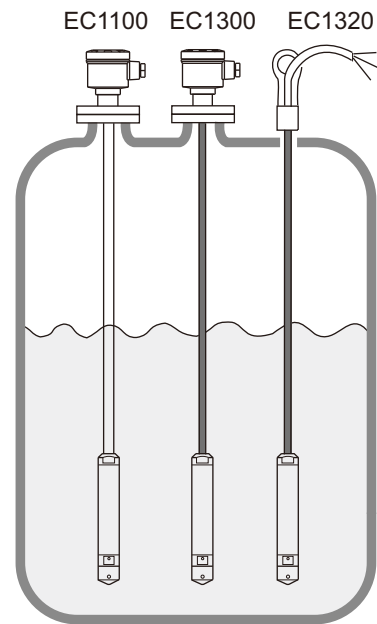

MODEL NUMBER/ORDER CODE COMPARISON TABLE

Model Number	Order Code
EC1100EM	ECX1E0000-AAKB140
EC1110EQ	ECX1E0000-AAKB101
EC1200EN	ECX1E200-FAKB142
EC1210EM	ECX1E000-BAKB140
EC1300EM	ECX1E000-CAKB140
EC1310EQ	ECX1E000-CAAB101
EC1320--	ECX1E100-C000000
EC1500BU	ECX1E000-DACA507
EC1500BQ	ECX1E000-EAAA501

ORDER INFORMATION

05	06	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27																																	
ECX1		0	0	-																																																	
<p>Model</p> <p>E0: Standard E1: Economy(Without housing) E2: Hi-temperature</p>																																																					
<p>Construction</p> <p>A: Extension tube type B: Flange type C: Extension cable type D: Transducer(Customization) E: Transducer(Standard) F: Flange diaphragm type</p>																																																					
<p>Connection</p> <table border="0"> <thead> <tr> <th>10 11</th> <th>12 13</th> <th>14 15</th> </tr> </thead> <tbody> <tr> <td>00: None</td> <td>00: None</td> <td>00: None</td> </tr> <tr> <td>Flange</td> <td>A5: 1/2"</td> <td>01: PT male</td> </tr> <tr> <td>AK: JIS-FF</td> <td>A7: 3/4"</td> <td>03: PF male</td> </tr> <tr> <td>AN: ANSI-RF</td> <td>B1: 1-1/2"</td> <td>07: NPT male</td> </tr> <tr> <td>AS: DIN-FF</td> <td>B2: 2"</td> <td>40: 5 kg/cm²</td> </tr> <tr> <td></td> <td>D6: DN15</td> <td>42: 10 kg/cm²</td> </tr> <tr> <td>Thread</td> <td>D7: DN20</td> <td>48: 150 Lbs</td> </tr> <tr> <td>AC: ANSI</td> <td>E1: DN40</td> <td>49: 300 Lbs</td> </tr> <tr> <td>AA: JIS</td> <td>E2: DN50</td> <td>57: PN10</td> </tr> <tr> <td></td> <td></td> <td>58: PN16</td> </tr> </tbody> </table>																					10 11	12 13	14 15	00: None	00: None	00: None	Flange	A5: 1/2"	01: PT male	AK: JIS-FF	A7: 3/4"	03: PF male	AN: ANSI-RF	B1: 1-1/2"	07: NPT male	AS: DIN-FF	B2: 2"	40: 5 kg/cm ²		D6: DN15	42: 10 kg/cm ²	Thread	D7: DN20	48: 150 Lbs	AC: ANSI	E1: DN40	49: 300 Lbs	AA: JIS	E2: DN50	57: PN10			58: PN16
10 11	12 13	14 15																																																			
00: None	00: None	00: None																																																			
Flange	A5: 1/2"	01: PT male																																																			
AK: JIS-FF	A7: 3/4"	03: PF male																																																			
AN: ANSI-RF	B1: 1-1/2"	07: NPT male																																																			
AS: DIN-FF	B2: 2"	40: 5 kg/cm ²																																																			
	D6: DN15	42: 10 kg/cm ²																																																			
Thread	D7: DN20	48: 150 Lbs																																																			
AC: ANSI	E1: DN40	49: 300 Lbs																																																			
AA: JIS	E2: DN50	57: PN10																																																			
		58: PN16																																																			
<p>Material</p> <p>MA: SUS 304 MB: SUS 316 MC: SUS 316L 21: PTFE coating</p>																																																					

(Next page)

ECX1 ⁰⁵ ⁰⁶ 0 0 - ⁰⁹ ¹⁰ ¹¹ ¹² ¹³ ¹⁴ ¹⁵ ¹⁶ ¹⁷ ¹⁸ ¹⁹ ²⁰ ²¹ ²² ²³ ²⁴ ²⁵ 0 ²⁷

¹⁸ ¹⁹ ²⁰ ²¹ **Length** _____

Code	Probe Length
0001~9999	0001~9999mm
A000~A999	10000~99900mm
B000~B500	100000~500000mm

²² ²³ ²⁴ ²⁵ **Pressure** _____

X000: 0 Bar
 0X05: 0.05 Bar
 0X10: 0.10 Bar
 0X15: 0.15 Bar
 0X20: 0.20 Bar
 ⋮
 400X: 400 Bar

²⁷ **Housing** _____

Code	Description
0	None
H	H type housing(AL)
J	J type housing(AL)
K	K type housing(AL)
L	L type housing(AL)
M	M type housing(SUS)
N	N type housing(SUS)
X	X type housing(AL)



Sensorsystem S.r.l.

via Amendola, 35/B

20037 Paderno Dugnano (Mi)

Tel. 02.9185051 Fax 02.99046839

www.sensorsystem.it info@sensorsystem.it